



MINI-CONSOLE 12,000 BTU

Multi-Room Ductless systems

Submittal Data: GEH(18)AA-D3DNA1C/I 12,000 BTU/H Mini Floor Console Unit

Job Name	Location	Date
----------	----------	------

Purchaser	Engineer
-----------	----------

Submitted To	For	<input type="checkbox"/> Reference	<input type="checkbox"/> Approval	<input type="checkbox"/> Construction
--------------	-----	------------------------------------	-----------------------------------	---------------------------------------

Unit Designation	Schedule No.
------------------	--------------

GENERAL FEATURES

- Quiet Operation -Multi-Speed Fan
- Swing Louvers
- Wireless Remote Controllers
- Remote Control Lockout
- Unlimited 10 yr. Parts Warranty



System Ratings

Cooling*	
Rated Capacity	11,946 BTU/H
Heating*	
Rated Capacity	12,969 BTU/H
Sound Pressure (Hi/Lo)**	
Cooling	42/27 dbA
Heating	42/27 dbA
Air Flow (max)	
Indoor Fan	353 CFM

Physical Specifications

Unit Dimensions (LxHxD)	27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm
Weight (Net/Shipping)	33/40 LBS
Drain Size (OD)	0.67-in 17-mm

Electrical Ratings

Fan Motor	
Output Power	30 W
FLA	0.36 A
Power Supply	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
MCA	1.0 A
Interconnecting Cable Wire Size	14-4 AWG

Refrigerant Piping Data


Refrigerant Type	R410A
Gas Pipe Size (OD)	3/8-in
Liquid Pipe Size (OD)	1/4-in
Connection Method	Flared

* Test conditions are based on AHRI 210/240.
**Sound Power ratings are per AHRI 270 and AHRI 350



DIMENSIONAL SPECIFICATIONS


12,000 BTUH MODEL

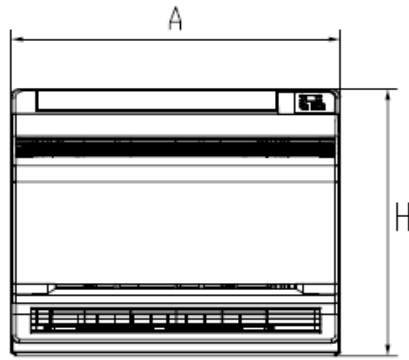

Front



Side

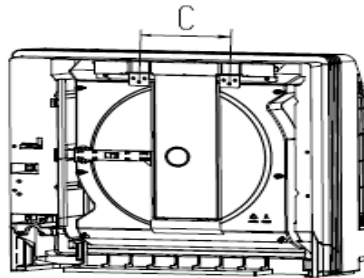


Back

Dimensions

	A	B	C	H
(mm)	700	215	200	600
(inches)	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port sizes.

MINIMUM & MAXIMUM CLEARANCES

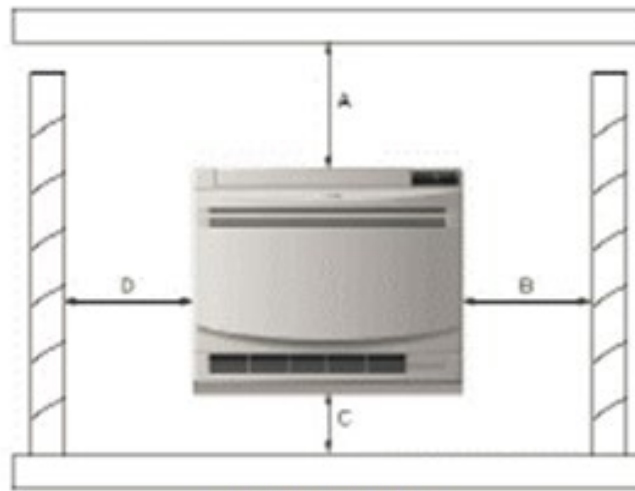

CLEARANCES			
MIN	MIN	MAX	MIN
A	B	C	D
60 (1524)	24 (610)	6 (152)	24 (610)

Inches (mm)

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.