



SUBMITTAL DATA

Single Zone 19 SEER 9KBTU 115V

Model: GWH09ATCXB-A6DNA3C/I & GWH09ATCXB-A6DNA1C/O

Job Name

Location

Date

Purchaser

Engineer

Submitted to

For

Unit Designation

Schedule No.



YBE1FB1F



GWH09ATCXB-A6DNA3C/I



GWH09ATCXB-A6DNA1C/O



XE71 (Optional)

GENERAL FEATURES:

- R32 Refrigerant
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Wireless Remote with LCD Display
- Wired Controller Options
- Wi-Fi Included
- Low Ambient Cooling down to 0°F (Range 0°F to 115°F)
- Low Ambient Heating down to -13°F (Range -13°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Test



Tel: +1-604-370-5676
Email: Airtek@greehvac.ca
Website: GREEHVAC.ca

12720 Bathgate Way
Richmond, BC V6V 1Z4
Canada

SPECIFICATIONS & FUNCTIONS:

Model		
Power Supply	VAC / Phase / Hertz	115 / 1 / 60
Power Supply Mode	-	Outdoor
Cooling Capacity	Btu/h	9100
Heating Capacity	Btu/h	10000
Cooling Power Input	W	762
Heating Power Input	W	803
Rated Input	W	1500
Rated Current	A	15.4
EER	(Btu/h)/W	11.9
COP	(Btu/h)/W	12.4
SEER	SEER2	20.5
HSPF	HSPF2	8.8
Air Flow Volume(H-L)	CFM	600/353/282/265/230/212/194/159
Dehumidifying Volume	Pint/h	1.69
Application Area	ft²	130-194
Controller Model	Remote	YBE1FB1F

Indoor Unit Model			GWH09ATCXB-A6DNA3C/I
Fan Type	-	Crossflow	
Fan Diameter Length (D×L)	mm	Φ94×630	
Cooling Speed	r/min	1350/1150/1000/950/850/750	
Heating Speed	r/min	1300/1100/1000/950/850/800	
Fan Motor Power Output	W	20	
Fan Motor RLA	A	0.39	
Motor ratings	hp	0.03	
Fan Motor Capacitor	μF	4	
Evaporator Form	-	Aluminum Fin-copper Tube	
Evaporator Pipe Diameter	mm	φ5	
Evaporator Row-fin Gap	mm	2-1.3	
Evaporator Coil Length (L×D×W)	mm	634×22.8×266.7	
Swing Motor Model	-	MP24HF	
Swing Motor Power Output	W	1.5	
Fuse Current	A	3.15	
Set Temperature Range	°F	61 ~ 86	
Sound Pressure Level Cooling mode	dB (A)	43/38/37/34/32/31/24	
Sound Power Level Cooling mode	dB (A)	53/48/47/44/42/41/34	
Sound Pressure Level Heating mode	dB (A)	40/35/34/32/30/28/25	
Sound Power Level Heating mode	dB (A)	50/45/44/42/40/38/35	
Dimension (W x H x D)	inch	32 56/64x10 53/64x7 56/64	
Dimension of Carton Box (L)	inch	35 3/64x12 61/64x10 15/64	
Dimension of Package(L)	inch	35 15/64x13 37/64x10 43/64	
Net Weight	lb	19.8	
Gross Weight	lb	24.3	

Outdoor Unit Model		GWH09ATCXB-A6DNA1C/O
Compressor Manufacturer	-	LANDA
Compressor Model	-	QXF-N082zC170
Compressor Oil	-	RB68GX or equivalent
Compressor Type	-	Rotary
Compressor LRA	A	
Compressor RLA	A	13.7
Compressor Power Input	W	630
Outdoor Unit Fan Type	-	Axial-flow
Outdoor Unit Fan Diameter	mm	400
Fan Motor Speed	rpm	850
Fan Motor Power Output	W	30
Motor ratings	hp	0.04
Fan Motor RLA	A	0.61
Air Flow Volume	CFM	1148
Condenser Form	-	Aluminum Fin-copper Tube
Condenser Pipe Diameter	mm	φ7
Condenser Rows-fin Gap	mm	1-1.2
Condenser Coil Length (L×D×W)	mm	666×19.05×527
Permissible Excessive Operating Pressure for the Discharge Side		624 P.S.I.G
Permissible Excessive Operating Pressure for the Suction Side		363 P.S.I.G
Maximum Allowable Pressure		856 P.S.I.G
Cooling Operation Ambient Temperature Range	°F	0~118
Heating Operation Ambient Temperature Range	°F	-13~75
Metering Device	-	Capillary
Defrosting Method	-	Automatic
Outdoor Unit Sound Pressure Level (H)	dB (A)	51
Outdoor Unit Sound Power Level (H)	dB (A)	61
Dimension (WxHxD)	inch	28 52/64x21 54/64x12 63/64
Dimension of Carton Box (LxWxH)	inch	31 9/64x14 44/64x23 15/64
Dimension of Package (LxWxH)	inch	31 17/64x14 51/64x24 14/64
Outdoor Unit Net Weight	lb	55.1
Outdoor Unit Gross Weight	lb	60.6
Refrigerant	--	R32
Factory Refrigerant Charge	oz	18.7
Connection Pipe Length	ft	24.6
Connection Pipe Gas Additional Charge	oz/ft.	0.2
Outer Diameter of Liquid Pipe	inch	1/4"
Outer Diameter of Gas Pipe	inch	3/8"
Max Distance Height	ft	40
Max Distance Length	ft	65

Functions				
Auto	Turbo	Intelligent Preheating	8°C Heating Mode	Auto Fan
Cooling	Temperature	Dry Anti-mildew Design	Turbo Cooling	Quiet
Heating	Soft Start	Several Optional Filters	Low Ambient Cooling	I Feel
Dehumidify	Self-Diagnosis	Auto Clean	Low Ambient Heating	Intelligent Defrosting
Air Flow	Lock	Timer Feature	Low Voltage Startup	Force Defrosting
Three Kinds of Sleep Mode	Compressor Electric Heater Function	Memory	Standby	Energy Saving
Vertical Auto Swing	LCD (Back Light)	Chassis Electric Heater Function	Multi Speeds	
Horizontal Auto Swing	LED	WIFI		



Tel: +1-604-370-5676
Email: Airtek@greehvac.ca
Website: GREEHVAC.ca


12720 Bathgate Way
Richmond, BC V6V 1Z4
Canada

DIMENSIONS

INDOOR UNIT

Unit: inch


GWH09ATCXB-A6DNA3C/I	
DIMENSIONS	
W	32-7/8
H	10-7/8
D	7-7/8
W1	7-3/64
W2	18-5/32
W3	7-11/16

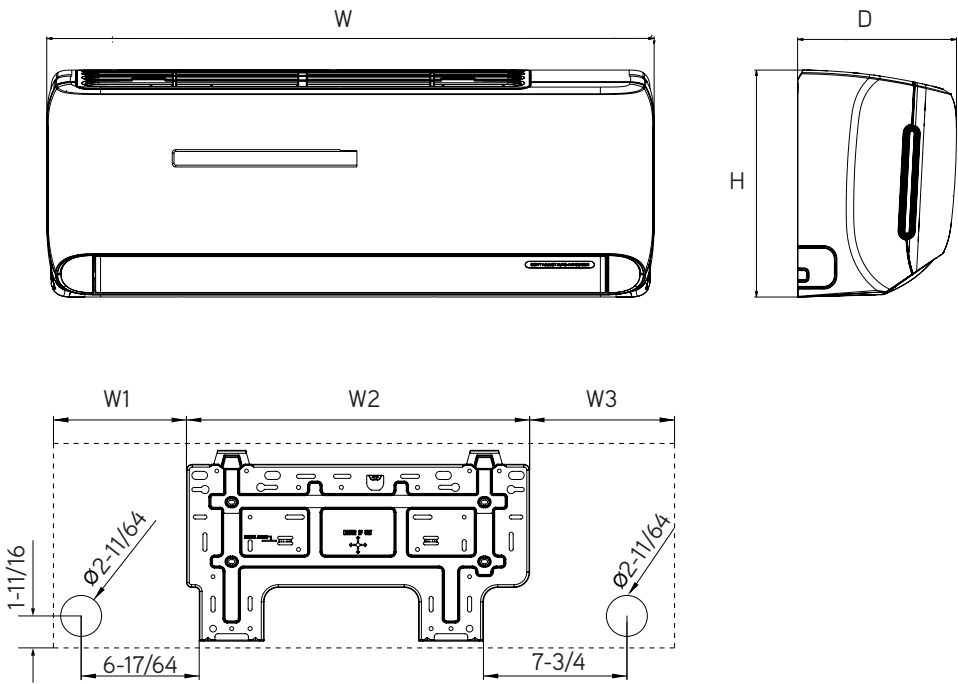

OUTDOOR UNIT

Unit: inch


GWH09ATCXB-A6DNA1C/O	
DIMENSIONS	
A	26-37/64
B	28-13/16
C	21-7/8
D	11-7/32
E	13
F	17-29/32
G	12-13/64

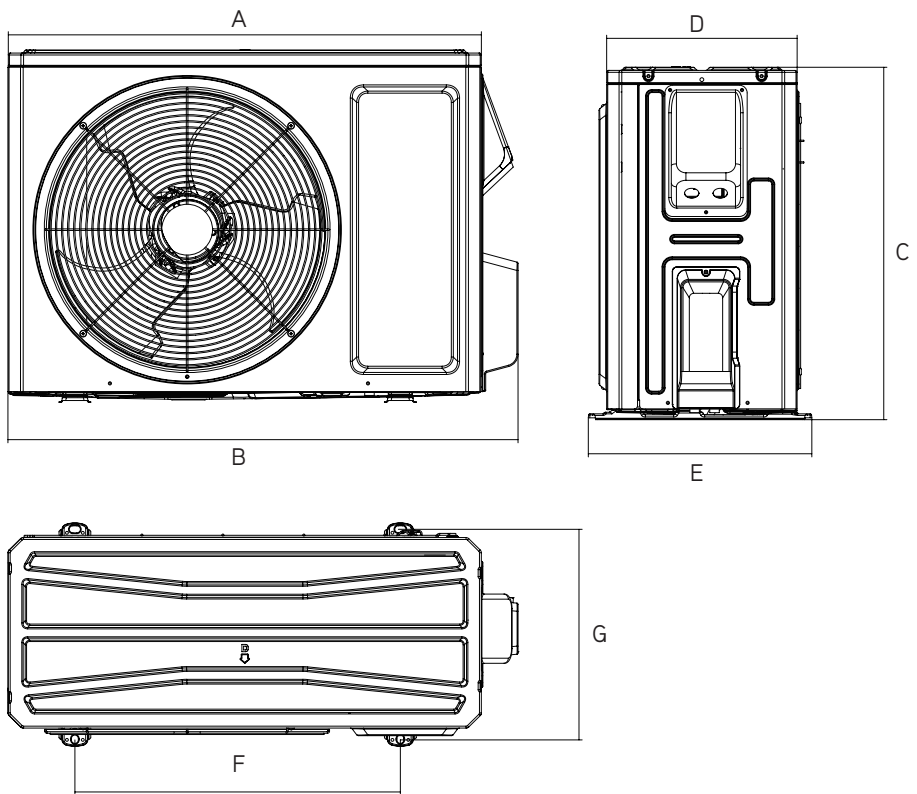

CLEARANCES

INDOOR UNIT

Minimum clearance

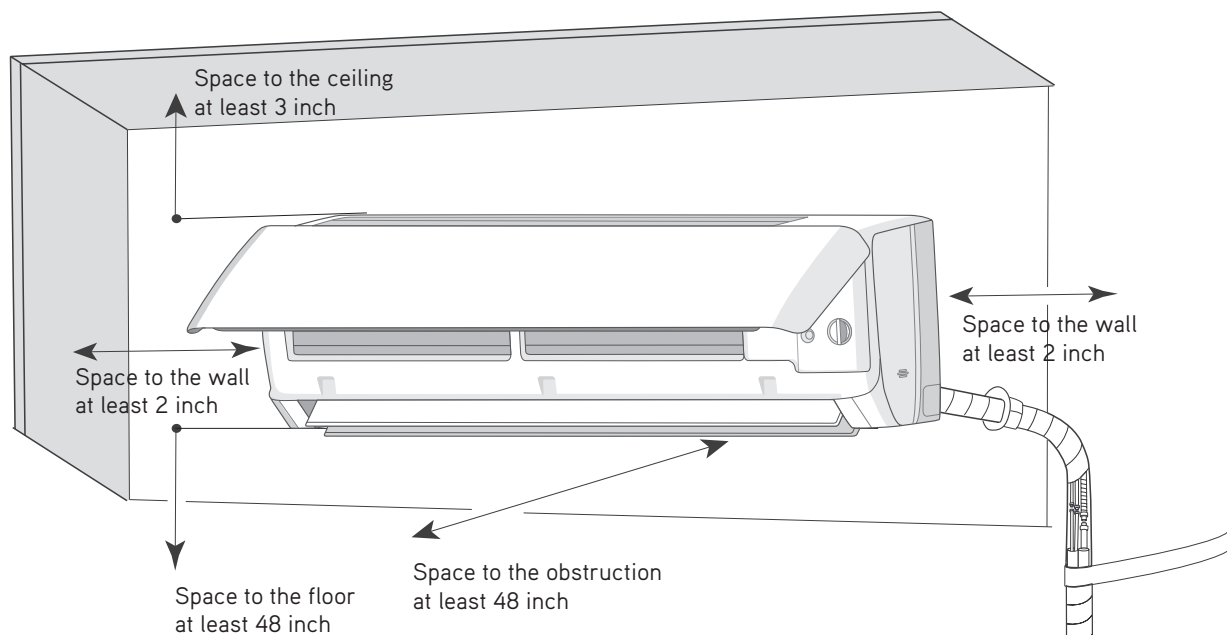

OUTDOOR UNIT

Minimum clearance

