



SUBMITTAL DATA

Duct Indoor Unit 12KBTU

Model: GFH(12)DA-D6DNA1A/I

Job Name

Purchaser

Submitted to

Unit Designation


Location

Date

Engineer

For

Schedule No.

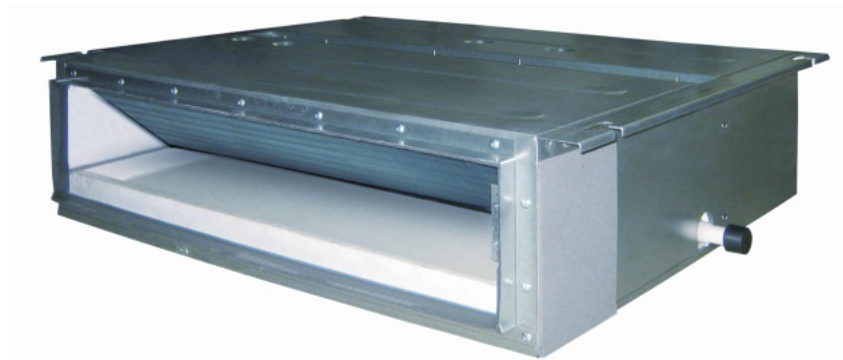

GENERAL FEATURES:

- R32 Refrigerant
- Quiet Operation
- Multi-Speed Fan
- Medium Static Pressure Capability
- Slim Line Construction 8" high
- Internal Condensate Drain Pump
- Flexible Return Air from Bottom or Rear
- XK-19 Wired Controllers
- Wireless Remote Controllers
- Sentry Condensate Overflow Protection
- Limited 5 yr. Parts Warranty



Tel: +1-604-370-5676
Email: Airtek@greehvac.ca
Website: GREEHVAC.ca

12720 Bathgate Way
Richmond, BC V6V 1Z4
Canada

SPECIFICATIONS & FUNCTIONS:

Product Model	GFH(12)DA-D6DNA1A/I	
Product Type	--	Duct
Rated Voltage	V	208/230
Min/Max. Voltage	V	187/253
Cooling Capacity	Btu/h	12000
Heating Capacity	Btu/h	12000
Air Flow Volume	CFM	353/288/247/212
Standard Static Pressure	Pa	60
Max. Static Pressure	Pa	150
Sound Pressure Level	dB (A)	38/33/29/26
Sound Power Level	dB (A)	48/43/39/36
Rated Dehumidification Capacity	L/h	1.4
Dehumidifying Volume	Pint/h	2.96
Cross-sectional Area of Power Cable Conductor	mm ²	0.82
Cross-sectional Area of Power Cable Conductor	sq in	0.001271
Recommended Power Cable (Core)	N	4
Fuse Current	A	5
Cooling Power Input	kW	0.092
Heating Power Input	kW	0.092
Cooling Current Input	A	0.4
Heating Current Input	A	0.4
Fan Type	-	Centrifugal
Fan Quantity	-	1
Fan Diameter-height	mm	202-107
Motor Model	-	FG150A-ZL
Motor Insulation Class	-	E
Motor Safe Class	-	IP23
Fan Motor Speed	r/min	940/770/670/570
Fan Motor Power Output	W	150
Fan motor running current	A	0.4
Evaporator Material	-	Copper tube-Aluminum fin
Evaporator Face Area	m ²	0.14
Evaporator Face Area	sq. ft	1.50696
Evaporator Pipe Diameter	mm	φ7.94
Evaporator Number of Rows	-	2
Evaporator Tube Pitch(a)×Row Pitch(b)	mm	22×19.05
Evaporator Fin Pitch	mm	1.8
Evaporator Fins per Inch (FPI)	-	14
Evaporator Fin Type	-	fenestrate plain and hydrophilic film
Evaporator Fin Color	-	Blue
Evaporator Number of Circuits	-	7
Evaporator Length (L×H×W)	mm	470×308×38
Evaporator Max. Allowable Pressure	MPa	10
Air Filter	-	PP
Air Filter Size (L×W/NO.)	inch	26.06×9.96/1
Standard Software and Controller	-	XK76
Optional Software and Controller	-	YT1FF
Gas Pipe (to indoor unit)	inch	0.5
Liquid pipe	inch	0.25
Connection method	-	Flare Connection
Drain Connection (outer diameter)	inch	φ0.98
Dimension of Outline (W×D×H)	inch	32.68×29.68×11.81
Dimension of Carton Box (L×W×H)	inch	35.2×31.69×13.58
Dimension of Package (L×W×H)	inch	35.31×31.81×14.17
Stacked Layers	-	8
Net Weight	lb.	70.6
Gross Weight	lb.	83.8

Functions	GFH(12)DA-D6DNA1A/I
Auto	YES
Cooling	YES
Heating	YES
Dehumidify	YES
Air Flow	YES
Sleep	Normal sleep mode
Vertical Auto Swing	NO
Horizontal Auto Swing	NO
Auto Fan	YES
Quiet	NO
I Feel	YES
Intelligent Preheating	YES
Ventilation	YES
Dry Anti-mildew Design	YES
Several Optional Filters (e.g.: Active Carbon)	Optional
Auto Clean	NO
Replaceable Front Panel	NO
Outdoor Air Available	YES
High Static Pressure	YES
Common Static Pressure	Optional
Low Static Pressure	NO
Timer Feature	YES
Memory	YES
Turbo	YES
Clock	YES
Temperature	YES
Self-Diagnosis	YES
Lock	YES
LCD (No Back Light)	NO
LCD (Back Light)	YES
LED	NO
Intelligent Defrosting	NO
Force Defrosting	YES
Energy Saving	YES
8°C Heating Mode	YES
Turbo Cooling	YES
Low Ambient Cooling	YES
Low Ambient Heating	YES
Low Voltage Startup	YES
Multi Speeds	Speed 4~5
With Access Control System	YES
With Water Pump	YES
Switchover Between High and Low Static Pressures	YES
Optional Ambient Temperature Sensor	YES
External Electronic Expansion Valve	YES



Tel: +1-604-370-5676
Email: Airtek@greehvac.ca
Website: GREEHVAC.ca


12720 Bathgate Way
Richmond, BC V6V 1Z4
Canada

DIMENSIONAL SPECIFICATIONS

GFH(12)DA-D6DNA1A/I

12,000 BTUH MODEL

Model # 12,000 BTUH 230V

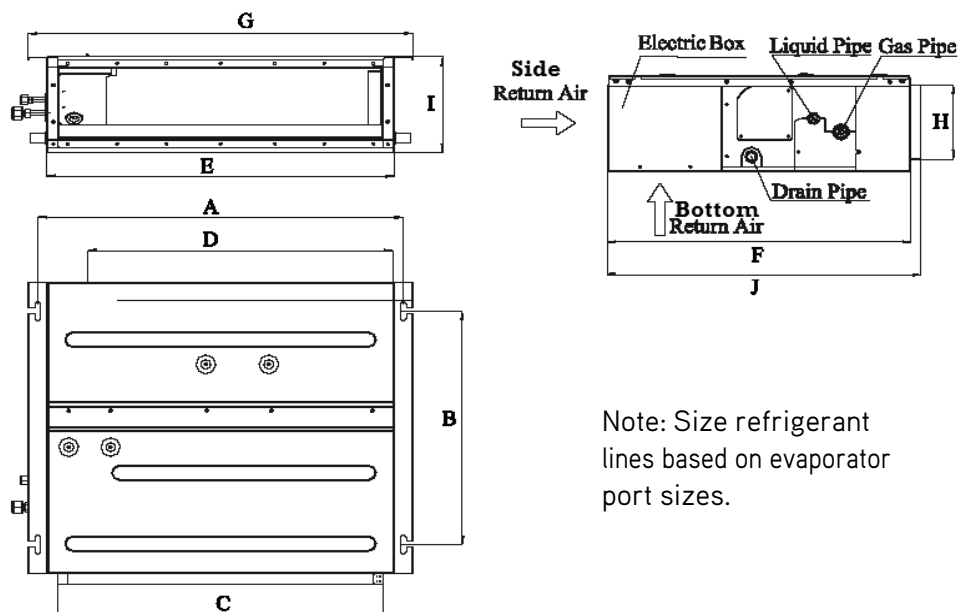

Note: Size refrigerant lines based on evaporator port sizes.


Dimensions

	A	B	C	D	E	F	G	H	I	J
(mm)	742	491	662	620	700	615	782	156	200	635
(inches)	29.2	19.3	26.1	24.4	27.6	24.2	30.8	6.1	7.9	25.0

Weight (Net/Gross) 49/60 lbs.

INDOOR FAN PERFORMANCE DATA

WG = inches of water gauge

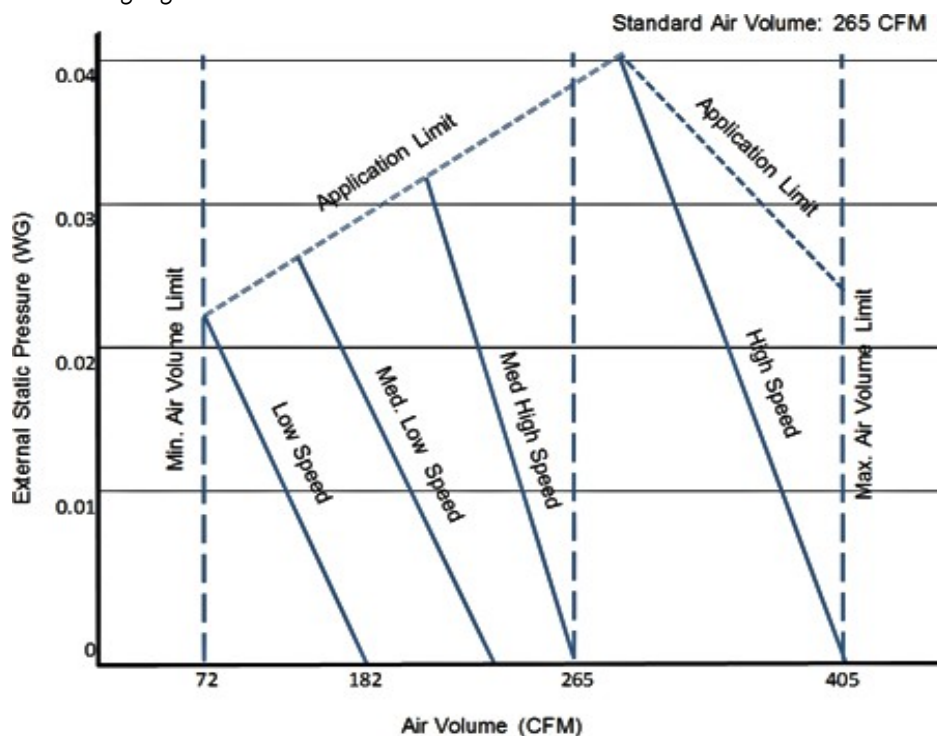

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.